

TEL: 91-11-24632950 Extn: 2219/2233 AFS: VIDDYXAX FAX: 91-11-24615508 E_mail:- gmais@aai.aero	INDIA AERONAUTICAL INFORMATION SERVICES AIRPORTS AUTHORITY OF INDIA RAJIV GANDHI BHAVAN SAFDARJUNG AIRPORT NEW DELHI – 110003	75/ 2008 22 nd December 2008
---	--	--

File No. AAI/NAD/09-09/AIP-SUPP (Part-AIS)

Following supplement is issued for information, guidance and necessary action.



K. RAMALINGAM
CHAIRMAN
AIRPORTS AUTHORITY OF INDIA

[Effective Date - 12 February 2009]

SUBJECT : AMENDMENT OF ILS PROCEDURE (X) RWY 27 – TRICHY AIRPORT

1. The existing ILS Procedure (X) Rwy 27 – Trichy Airport promulgated vide AIP India 6th Edition page NO. AD2-VOTR 9 has been amendment as given below:-

1.1 Location of NDB: – NDB (307 TR) has been relocated at 10 45 41 N 078 43 06 E.

1.2 Holding Procedure: - One minute left hand pattern inbound track 079 Deg M.
 Minimum holding altitude 3000 feet.

1.3 Procedure Turn: - Procedure turn has been designated as LEFT.

1.4 G.P. In-Operative Procedure :-

- (i) FAF : 5.1D (ILS DME)
- (ii) Descent Gradient : 5.24%
- (iii) Distance /Altitude Information and ground speed / rate of descent information have been amended accordingly.

1.5 Rest of the procedure remains unchanged.

2. Revised chart ILS (X) Rwy 27 is enclosed.

3. The following stand cancelled.



- (i) AIP Indian 6th edition page AD2 VOTR 9.
- (ii) G-Series NOTAM No. G-0189/08

INSTRUMENT
APPROACH
CHART

AERODROME ELEV. 288ft.
HEIGHTS RELATED TO
THR RWY 27 ELEV.275ft

TWR.118.3
APP.124.0

TIRUCHIRAPALLI
INDIA
ILS (X) RWY 27
(Cat A/B/C)

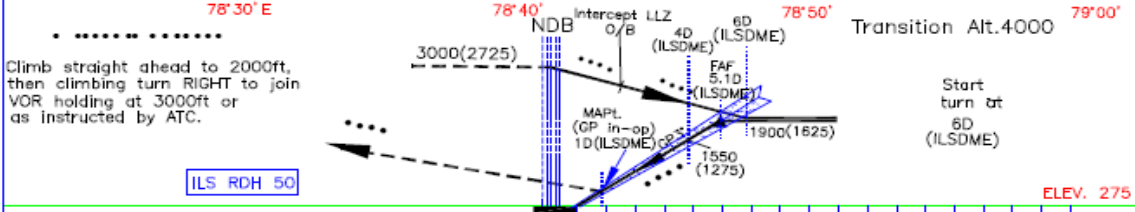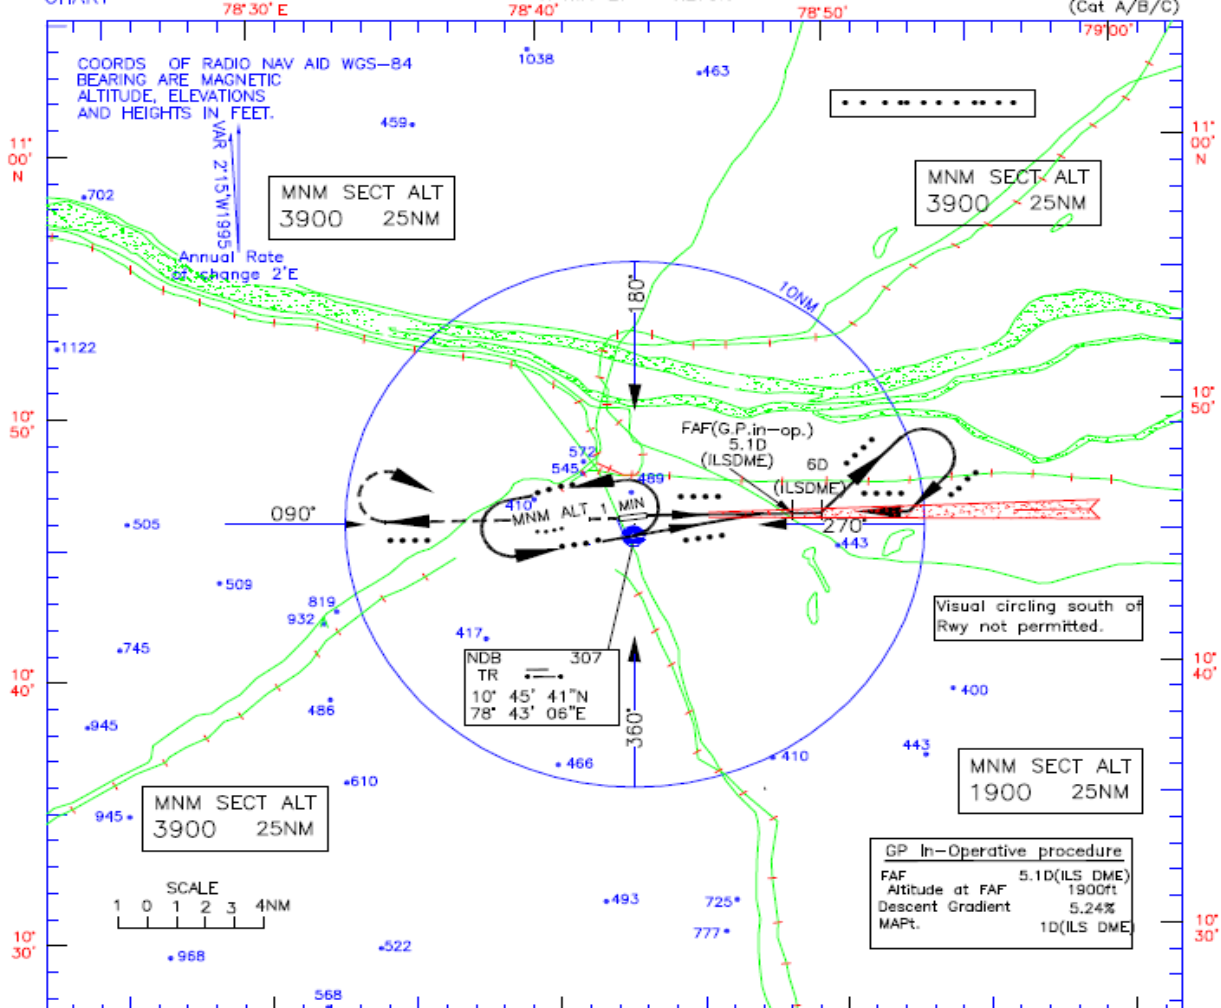

Nautical miles from THR RWY 27

CATEGORY OF AIRCRAFT	O C A (H)		Distance / Altitude information(G.P in-op)						
	A/B	C	Distance(NM)	5.1D	5D	4D	3D	2D	
STRAIGHT-IN	520(245)	520(245)		1900	1870	1550	1240	920	
VISUAL CIRCLING	870(582)	1010(722)	Rate of Descent /Ground speed information						
GP In-Operative procedure			Ground speed (kt.)		80	100	120	140	160
STRAIGHT-IN	680(405)	680(405)	Rate of descent (ft/min)		425	530	635	745	850
VISUAL CIRCLING	870(582)	1010(722)							

AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C	
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT
STRAIGHT-IN						
NORMAL MINIMA	800	1200	800	1200	800	1200
RESTRICTED MINIMA	1400	1800	1400	1800	900	1300
GP IN-OP NORMAL MINIMA	2000	2400	2000	2400	2400	2800
RESTRICTED MINIMA	2400	2800	2400	2800	2800	3200
NORMAL CIRCLING MINIMA					3600	4000
RESTRICTED CIRCLING MINIMA					3600	4800

DRG. NO. AAI/24-IALC/08/19.12.08